




Art.-No.: YWDRO-RAND-5301-D
**LED luminaire "RONDO", w-/c- surface mounting, direct/
indirect distribution, round, 600x62mm, 53W, 7250lm,
4000K, CRI >80, IP40, white, Dali dimmable**

LED ceiling- and wall-mounted luminaire, RONDO series, with direct/indirect beam, as the basic lighting for rooms in a commercial environment and at home. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

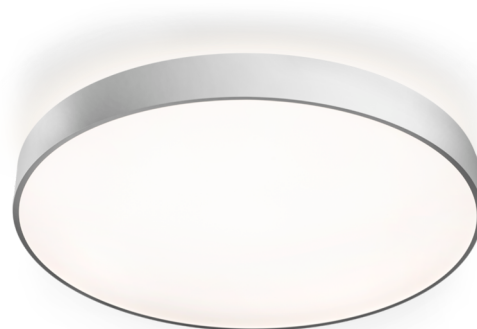

TECHNICAL DATA


| Electrical data | |
|--------------------------|--|
| Input Voltage AC | AC 220-240V / 50-60Hz |
| Power Factor | 0.95 |
| System power | 53 W |
| Inrush current | 20 A |
| Luminaires on B10A fuse | 15 Stk. |
| Luminaires on B16A fuse | 24 Stk. |
| Luminaires on C10A fuse | 24 Stk. |
| Luminaires on C16A fuse | 40 Stk. |
| DC Ready | Yes |
| Connection cross section | 1.5 mm ² |
| Dimming | DALI |
| Electrical version | with internal operating device, dimmable |
| CASAMBI Ready | Yes |



| Photometrical data | |
|--------------------------------|-----------------|
| Light source | LED |
| Colour temperature | 4,000 K |
| Rated luminous flux | 7,250 lm |
| Luminous efficacy | 137 lm/W |
| Light colour | 840 |
| Colour rendering index (CRI) | > 80 |
| Colour tolerance | 3 |
| Beam angle | 105.6 ° |
| UGR | 22 |
| Lifetime (h, at 25°C) | 50,000 h, L80 |
| Acceptance tests | |
| Certifications | CE, ENEC |
| Protection class | I |
| Ingress protection (IP) rating | IP 40 |
| Glow wire test | 650° C |
| Ambient temperature | 0 to +25 C° |
| Physical data | |
| Mounting method | ceiling mounted |
| Housing material | Aluminium |
| Housing colour | white |
| Cover material | PMMA |
| Height (H) | 62 mm |
| Diameter ø | 600 mm |
| Product weight | 5.7 kg |
| Weight incl. Packaging | 5.9 kg |
| Packaging Length (L) | 610 mm |
| Packaging Width (B) | 610 mm |
| Packaging Height (H) | 100 mm |



LIGHT DISTRIBUTION

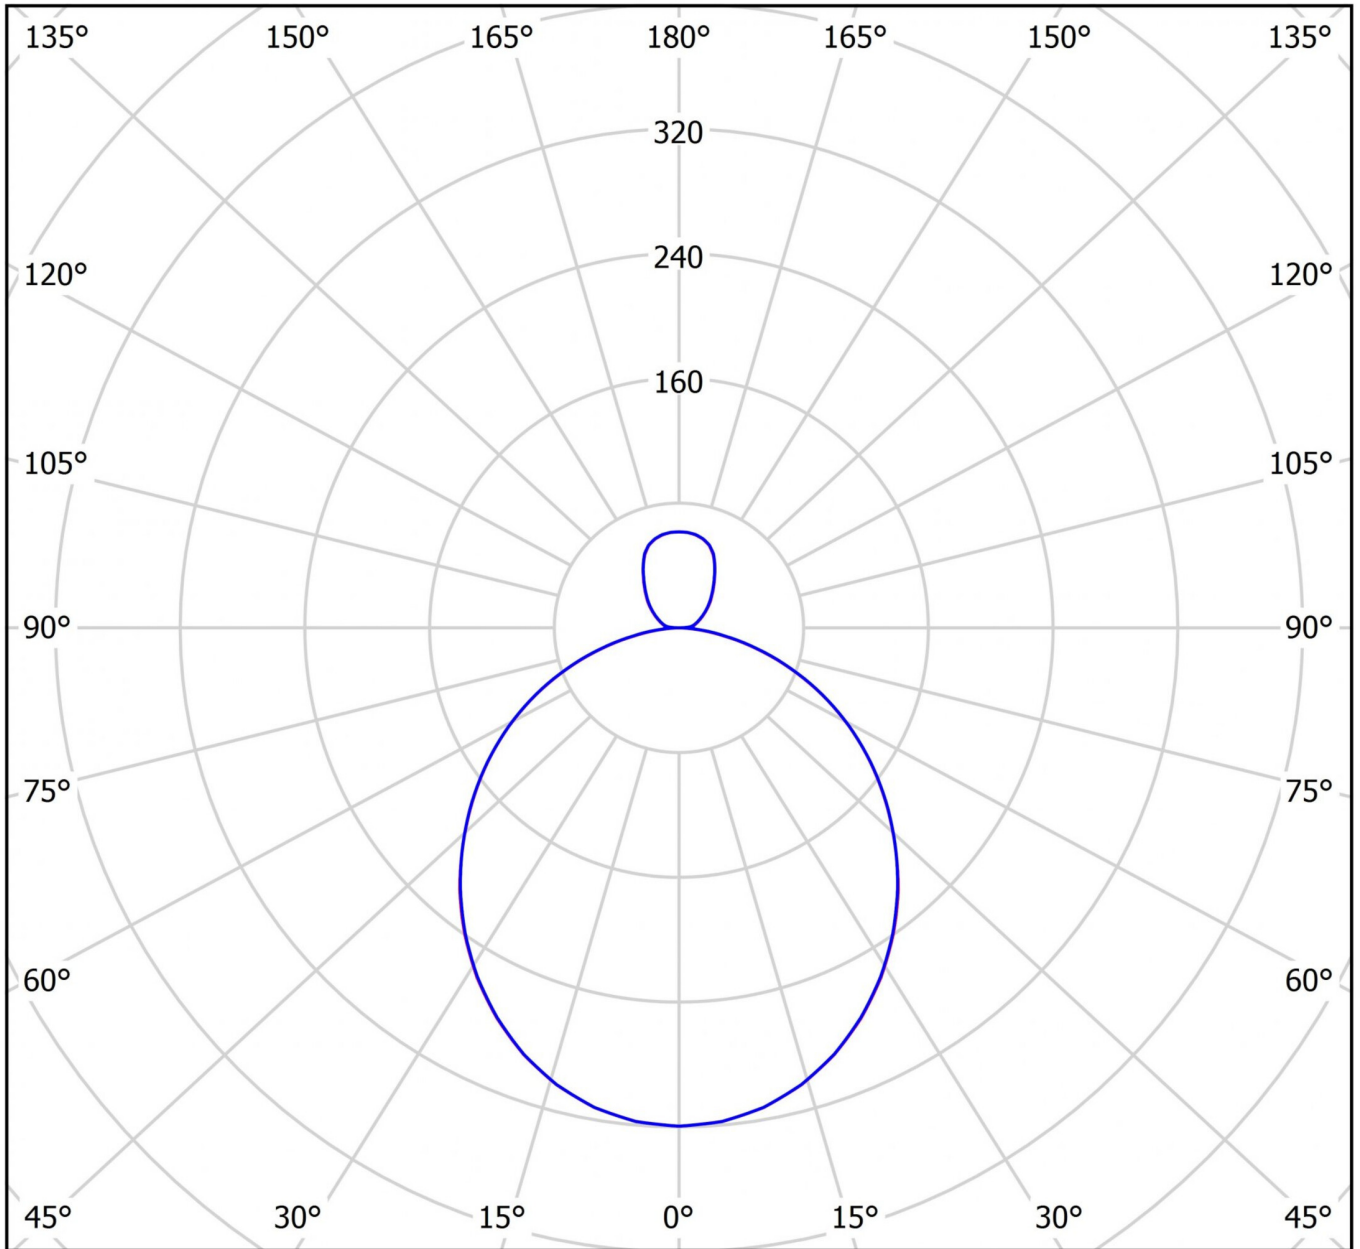

cd/klm

$\eta = 100\%$

— C0 - C180 — C90 - C270